
## CAME T ÖZAK

## **TECHNICAL SPECIFICATIONS**

## **Dimensions** (mm)

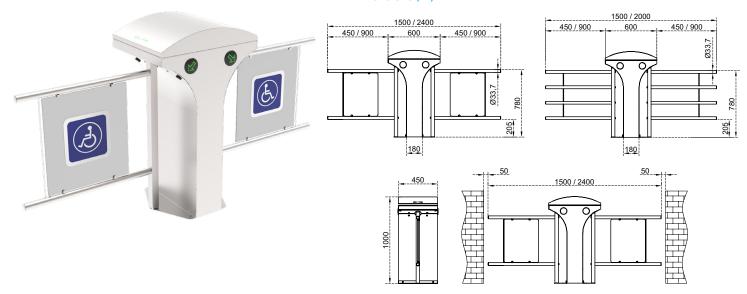

Too	hni	00	Feati	1800
100		11021	I FPAII	11 12 5

Operating Temperature, Humidity  -20°C/+68°C (opt50°C with heater positive), RH 95% non-condensing.  Departing Intensity  100%, 7/24 use.  Material : 304 grade (opt. 316 grade) stainless steel. Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).  Material : 033,7x1,5 mm 304 grade stainless steel pipe with acrylic infill (for indoor use),
Body Features       Material Finishing       : 304 grade (opt. 316 grade) stainless steel.         Finishing       : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).         Wing       Material       : Ø33,7x1,5 mm 304 grade stainless steel pipe with acrylic infill (for indoor use),
Finishing: Orbital brushed matt (opt. electrostatic powder coating on stainless steel).  Material: 033,7x1,5 mm 304 grade stainless steel pipe with acrylic infill (for indoor use), 033,7x1,5 mm 304 grade stainless steel pipe (for outdoor use).  Finishing: Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).  Indicators  Side Status / Direction Indicators: LED, standard.  Top Passage Indicator: LED, standard.  Operating Voltage: 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption: ~18W at stand-by, max ~44+44W (varies according to the options and accessories used).  System operates bi-directionally (entry-exit).
Wing  Ø33,7x1,5 mm 304 grade stainless steel pipe (for outdoor use).  Finishing: Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).  Indicators  Side Status / Direction Indicators: LED, standard.  Top Passage Indicator: LED, standard.  Operating Voltage: 110/220V AC 50/60 Hz. (±10%), 24V DC.  Consumption: ~18W at stand-by, max ~44+44W (varies according to the options and accessories used).  System operates bi-directionally (entry-exit).  Operating modes can be adjusted through the buttons and screen on the control card.
Top Passage Indicator : ( > ) LED, standard.  Power Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~18W at stand-by, max ~44+44W (varies according to the options and accessories used).  System operates bi-directionally (entry-exit).  Operating modes can be adjusted through the buttons and screen on the control card.
Consumption: ~18W at stand-by, max ~44+44W (varies according to the options and accessories used).  System operates bi-directionally (entry-exit).  Operating modes can be adjusted through the buttons and screen on the control card.
Operating modes can be adjusted through the buttons and screen on the control card
Operating Modes  Entry - exit controlled Entry - exit free (with optional photocell)  Entry controlled, exit free (with optional photocell)  Exit controlled, entry free (with optional photocell)
Operating System Electromechanical motorized operation.
All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected.  Control System  Controllable by dry contact (ground control).  Compatible with all kinds of access control device.  Optional RS232, RS485 or TCP/IP module is available.
Flow Rate Wing opening / closing time : ~1,5 sec.
Emergency Mode  System provides a free passageway (entry-exit) by opening the wing in preferred direction configured by dip switch (fail safe). World compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating model.
Power-off Situation  System provides a free passageway (entry-exit) by manually pushing the wing towards entry or exit directions (fail safe). Optionally set as entry-exit locked (fail secure). Free passageway can be granted by manual override key in fail secure option.
Weight ~59 kg
Wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), coin slot and coin box multiple intelligent coin/token slot and box, counter (with/without reset), card reader mounting bracket, photocell alarm sensor, her positive, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, photocell for free mode electrostatic powder coating on stainless steel.